
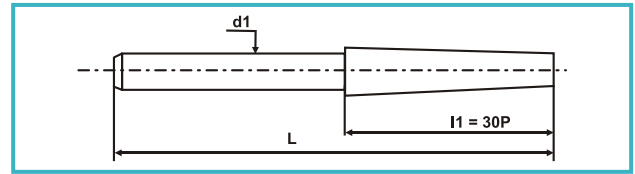


## Nib Taps

Coarse & Fine Pitch

BSW / BSF  
UNC / UNF

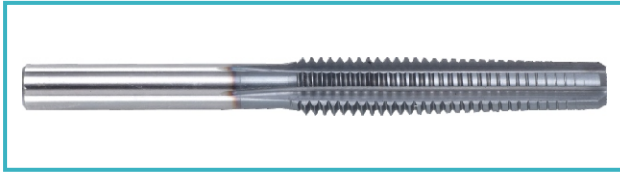

**Miranda** Nib Taps are made from M2, M35 M42 grade of HSS.

**Miranda** Nib Taps are Manufactured with Ground Threads in Coarse & Fine Pitch.

**Miranda** Taps of dia 1/4" and below will be supplied with external (male) centre on both sides or chamfer at Shank side  
And dia 5/16" and above will be supplied with internal (female) centre on both side.

**Miranda** Standard Nib Taps are supplied with tolerance ISO Class 2, 2B, Zone 3.

**Miranda** Taps are available in TiN, TiCN Coating.

**Miranda** Taps are also available in H Type, AH Type, R Type & Lead Guide Taps.

**Miranda** Taps are also supplied with tolerances like ISO Class 1, ISO Class 3 and Special tolerance on request of customer.

Size	Pitch TPI.	Thread Length l1	Overall Length L	Shank Dia. d1
1/8"	40	19.00	60.00	2.20
3/16"	24	32.00	75.00	3.00
1/4"	20	38.00	85.00	4.50
5/16"	18	42.00	90.00	6.00
3/8"	16	48.00	95.00	7.80
7/16"	14	55.00	102.00	8.60
1/2"	12	64.00	110.00	9.50
9/16"	12	64.00	114.00	11.40
5/8"	11	69.00	127.00	12.70
3/4"	10	76.00	133.00	15.50
7/8"	9	85.00	148.00	18.50
1"	8	95.00	165.00	21.00

Unspecified and other big sizes are available on request.

Range	Witworth Thread	Unified Thread
Size Range	1/8" to 2"	1/8" to 2"
Pitch Range	40 TPI to 6 TPI.	40 TPI to 6 TPI.
<b>Application</b>	<b>Nut Tapping on automatic machine</b> <b>Use TiN Coated Nib tap for cold formed Nuts</b> <b>Use TiCN Coated Nib tap for hot formed Nuts</b>	
For high tensile steel and stainless steel use coated tap with Material M35 or M42 respectively.		

### Packing

Split Plastic Packing Box

Plastic tube

As per customer requirement